


S40-ME


MOTOR POWER: 1500W - 3000W

MOTOR POWER: 3000W - 6000W

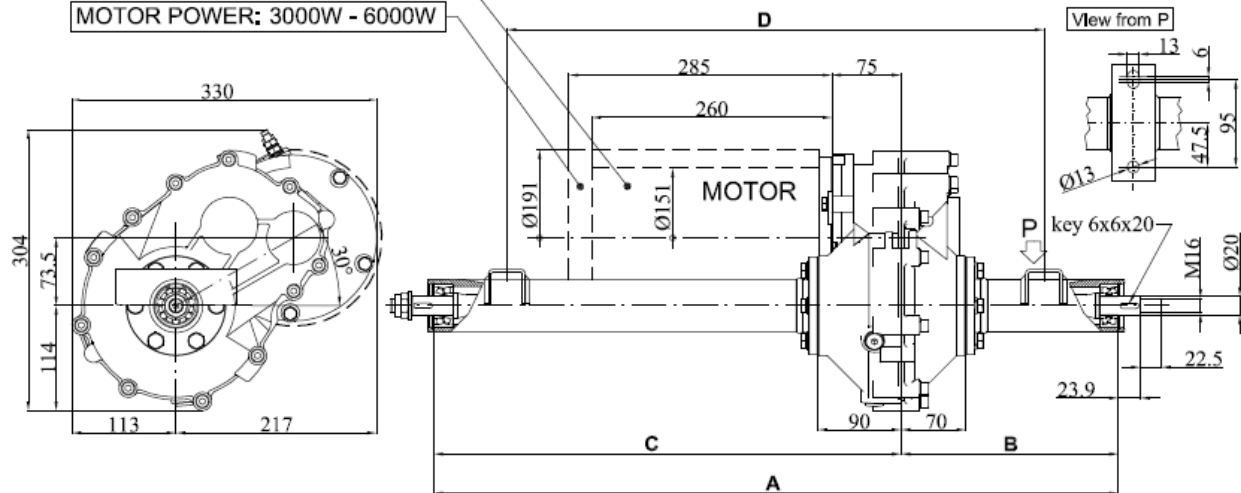


OPTIONAL

- FRENO ELETTROMAGNETICO 20Nm
- ELECTROMAGNETIC BRAKE 20Nm



OPTIONAL

- FRENO ELETTROMAGNETICO 40Nm
- ELECTROMAGNETIC BRAKE 40Nm



Italiano

DATI TECNICI:

- Motore fino a 6000W - 24V/36V/48V/72V/80V
- Coppia massima in uscita 900Nm
- Rapporti di riduzione standard: 10:1 - 12:1 - 13:1 - 15:1 - 16:1 - 18:1 - 20:1
- Assale per trazione posteriore con carichi fino a 850kg
- Attacco alla ruota: tramite albero
- Carreggiata a richiesta cliente

MISURE A DISEGNO:

- A = min.800mm - max.1150mm
- B = a richiesta
- C = a richiesta
- D = a richiesta


English

SPECIFICATIONS:


- Motor up to 6000W - 24V/36V/48V/72V/80V
- Maximum output torque 900Nm
- Standard gear ratios: 10:1 - 12:1 - 13:1 - 15:1 - 16:1 - 18:1 - 20:1
- Axle for rear drive for loads up to 850kg
- Wheel fitting: with shaft
- Track according to customer's requirements

DIMENSIONS TO DRAW:

- A = min.800mm - max.1150mm
- B = according to customer's requirements
- C = according to customer's requirements
- D = according to customer's requirements

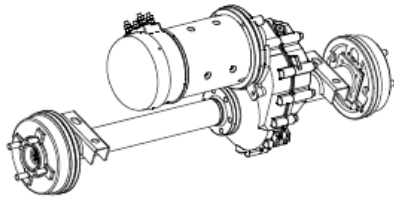

S40-160


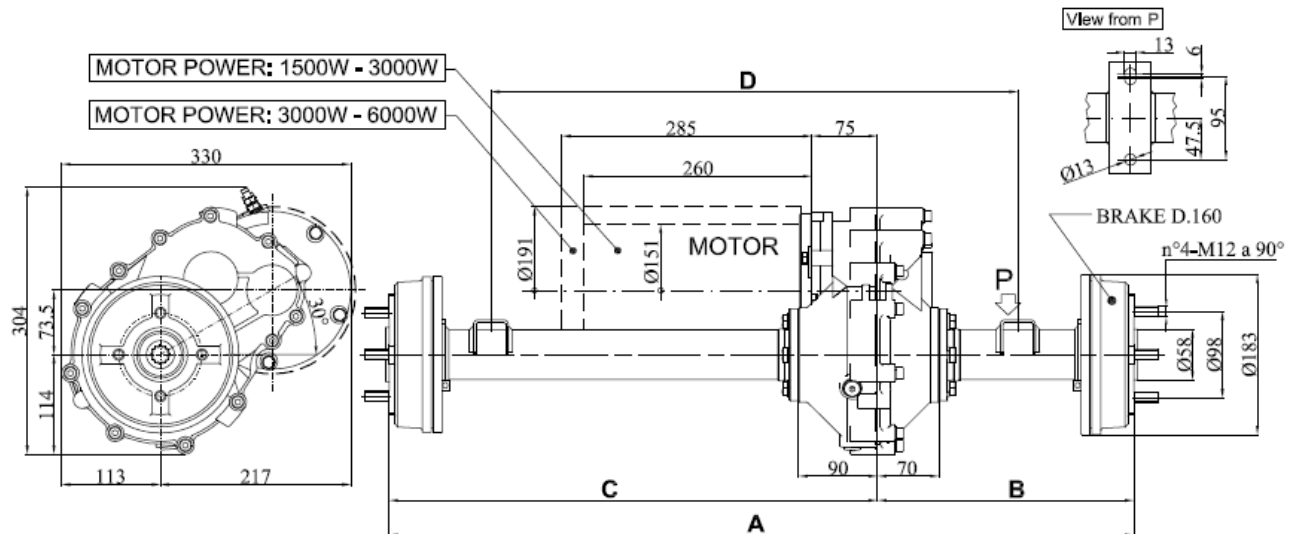


MOTOR POWER: 1500W - 3000W

MOTOR POWER: 3000W - 6000W

OPTIONAL
- FRENO ELETTROMAGNETICO 20Nm
- ELECTROMAGNETIC BRAKE 20Nm

OPTIONAL
- FRENO ELETTROMAGNETICO 40Nm
- ELECTROMAGNETIC BRAKE 40Nm



Italiano

DATI TECNICI:

- Motore fino a 6000W - 24V/36V/48V/72V/80V
- Coppia massima in uscita 900Nm
- Rapporti di riduzione standard: 10:1 - 12:1 - 13:1 - 15:1 - 16:1 - 18:1 - 20:1
- Assale per trazione posteriore con carichi fino a 850kg
- Attacco alla ruota: tramite freno a tamburo meccanico con diametro frenata Ø160
- Carreggiata a richiesta cliente

MISURE A DISEGNO:

- **A** = min. 800mm - max. 1150mm
- **B** = a richiesta
- **C** = a richiesta
- **D** = a richiesta


English

SPECIFICATIONS:


- Motor up to 6000W - 24V/36V/48V/72V/80V
- Maximum output torque 900Nm
- Standard gear ratios: 10:1 - 12:1 - 13:1 - 15:1 - 16:1 - 18:1 - 20:1
- Axle for rear drive for loads up to 850kg
- Wheel fitting: with mechanical drum brakes with Ø160 braking diameter
- Track according to customer's requirements

DIMENSIONS TO DRAW:

- **A** = min. 800mm - max. 1150mm
- **B** = according to customer's requirements
- **C** = according to customer's requirements
- **D** = according to customer's requirements

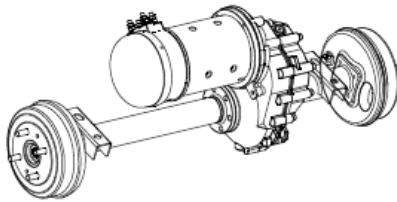


S40-185

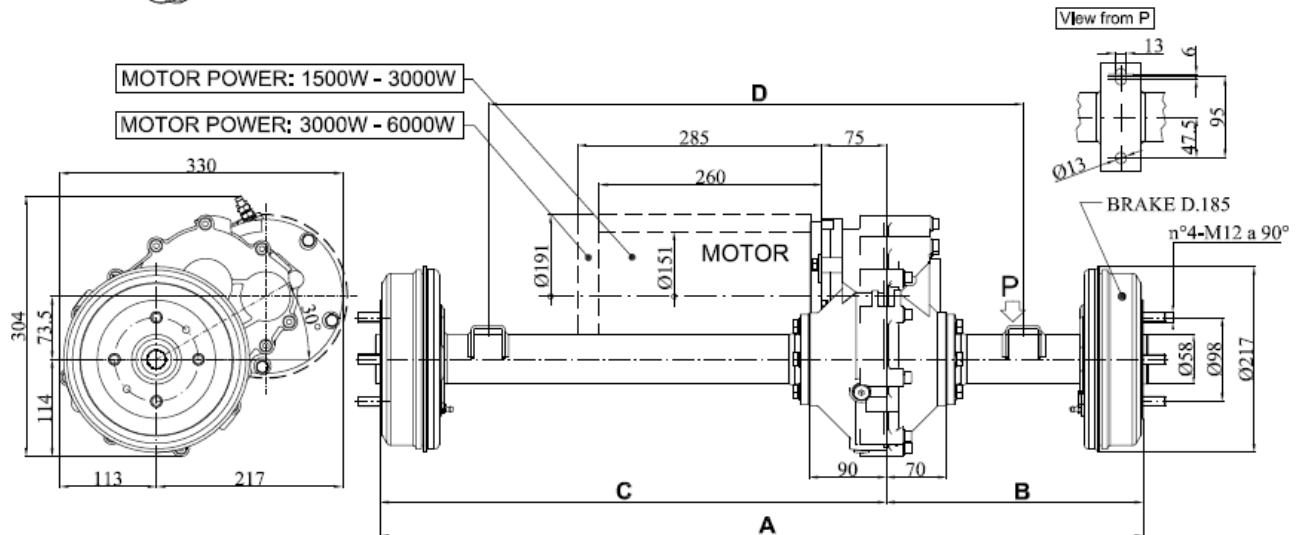


OPTIONAL

- FRENO ELETTROMAGNETICO 20Nm
- ELECTROMAGNETIC BRAKE 20Nm



OPTIONAL

- FRENO ELETTROMAGNETICO 40Nm
- ELECTROMAGNETIC BRAKE 40Nm



Italiano

DATI TECNICI:

- Motore fino a 6000W - 24V/36V/48V/72V/80V
- Coppia massima in uscita 900Nm
- Rapporti di riduzione standard: 10:1 - 12:1 - 13:1 - 15:1 - 16:1 - 18:1 - 20:1
- Assale per trazione posteriore con carichi fino a 1200kg
- Attacco alla ruota: tramite freno a tamburo meccanico con diametro frenata Ø185
- Carreggiata a richiesta cliente

MISURE A DISEGNO:

- A = min.800mm - max.1150mm
- B = a richiesta
- C = a richiesta
- D = a richiesta

English

SPECIFICATIONS:

- Motor up to 6000W - 24V/36V/48V/72V/80V
- Maximum output torque 900Nm
- Standard gear ratios: 10:1 - 12:1 - 13:1 - 15:1 - 16:1 - 18:1 - 20:1
- Axle for rear drive for loads up to 1200kg
- Wheel fitting: with mechanical drum brakes with Ø185 braking diameter
- Track according to customer's requirements

DIMENSIONS TO DRAW:

- A = min.800mm - max.1150mm
- B = according to customer's requirements
- C = according to customer's requirements
- D = according to customer's requirements